








SPECIFICATIONS


	Max 2011 Whiches Divix	поо	
Order Code	AX2-50	AX2-100	
LED Engine	TITAN LED Engine	TITAN LED Engine	
Colors	RGBMintAmber	RGBMintAmber	
Total LED Power	80W	160W	
Power Draw	40W	80W	
Light output - 2700k, 3200k,5500k*	1800lm, 2230lm, 2265lm	3600lm, 4460lm, 4530lm	
CRI(Ra)/TLCI 3200-6500k*	≥96	≥96	
Beam Angle	21°	21°	
Strobe	0 - 25Hz	0 - 25Hz	
Pixels	8	16	
Battery Lifetime	70 % after 300 cycles	70 % after 300 cycles	
Battery Runtime	up to 20 hours	up to 20 hours	
Charging Time (nominal)	5 hrs	5 hrs	
Input Voltage	100 - 240VAC, 50/60 Hz, 2A, 49W	100 - 240VAC, 50/60 Hz, 2A, 104W	
Wired DMX	Yes	Yes	
CRMX Receiver	Built in	Built in	
Wireless Frequencies	CRMX 2.4GHz, UHF	CRMX 2.4GHz, UHF	
Range	300m (330yds)	300m (330yds)	
Housing	Aluminium	Aluminium	
IP Rating	IP65	IP65	
Ambient Temperature	0° - 40° C (32° - 104° F)	0° - 40° C (32° - 104° F)	
Weight	4.5 kg (9.9 lbs)	7.4 kg (16.3 lbs)	
Dimensions with hook (mm/inches)	520 x 165 x 65 / 20.5 x 6.5 x2.6	1020 × 165 × 65 / 40.1 × 6,5 × 2,6	
Dimensions without hook (mm/inches)	500 x 165 x 65 / 19.7 x 6.5 x2.6	1000 x 165 x 65 / 39.4 x 6.5 x 2.6	

RF CHARACTERISTICS

Wireless Modules	EU: UHF (863-870MHz)	USA: UHF (917-922.20MHz)	AUS: UHF (922.30-927.50MHz)	SGP: UHF (920.50-924.50MHz)
Modulation	FHSS	FHSS	FHSS	FHSS
ERP (Transmitter)	<25mW	<25mW	<25mW	<25mW
Channel Count	47	53	53	41
Wireless Modules	KOR: UHF (917.9-921.5MHz)	RUS: UHF (868.75-869.12MHz)	JPN: UHF (922.80-926.40MHz)	CRMX (2402-2480MHz)
Modulation	FHSS	FHSS	FHSS	FHSS
ERP (Transmitter)	<25mW	<25mW	<25mW	-
Channel Count	10	6	19	79

DRAWINGS

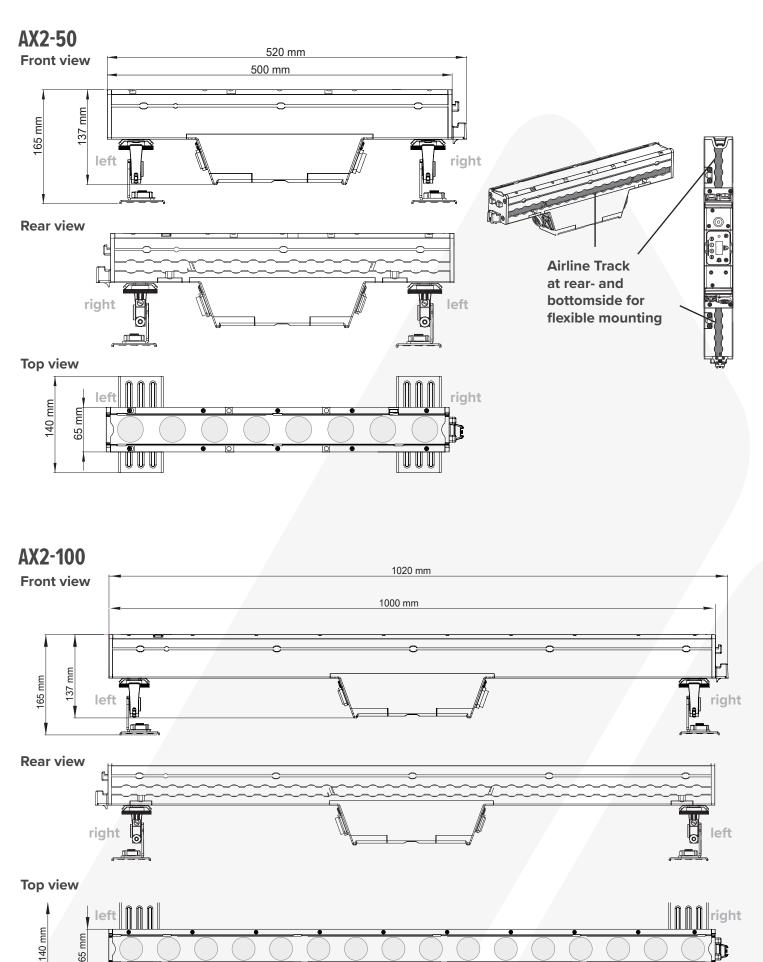


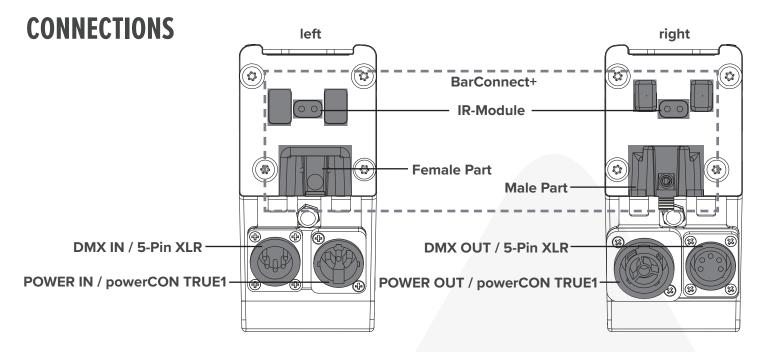



BARCONNECT+

Quickly merge several PixelBars while maintaining the pixel pitch. Aim connected units together to maintain consistent lighting or hang them. The integrated IR modules enable auto-addressing for AsteraApp and DMX control.

Connect AX2









Consistent pixel pitch between LEDs
62.5mm / 2.46 inch 62.5mm / 2.46 inch 62.5mm / 2.46 inch 62.5mm / 2.46 inch

ACCESSORIES

FEATURES








Weight (1pc): 390g / 0.86 lbs


TrackHanger AX-TH





Weight: 125g / 0.27lbs


Hang with TrackHanger








Please use
Safety rigging point
Please check the safety
regulations in your region.

Permitted way hanging/safeing several AX2



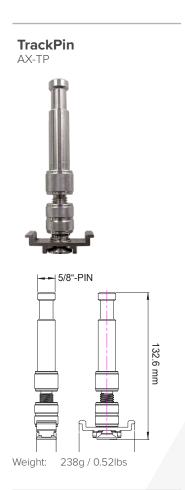

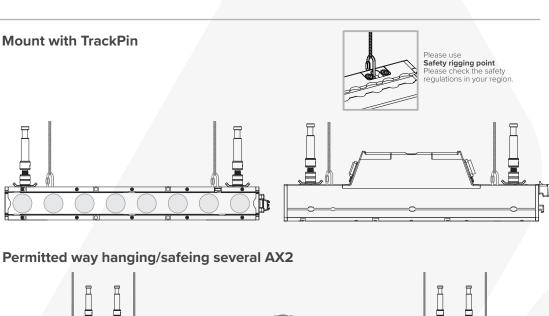


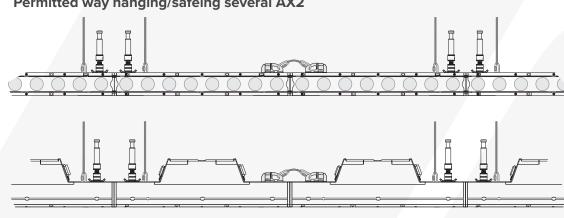






Control light shape with Barndoors

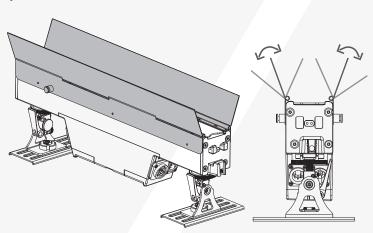

FlyBar





Jump Cable

AX2-JC






LIGHT OUTPUT PERFECTLY MIXED



TYPICAL SPECTRAS

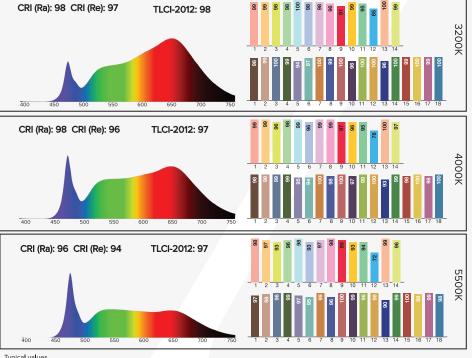

Typical values